

**PC/HD Switcher 4 input : 1 output
w/RS232 - ID# 594**



Operation Manual

Introduction


PC/HD Switcher 4 input : 1 output w/RS232 is perfect solution for switching between various PC/HDTV sources such as PCs, DVD... to share one display monitor, TV or projector with resolution up to WUXGA/1080p.

Features

- LED indicators
- IR remote control.
- Supports high resolution input:
PC: VGA, SVGA, XGA, SXGA,UXGA(1600x 1200) and
WUXGA(1920x1200),& HDTV: 480i, 576i, 480p, 576p, 720p. 1080i and
1080p.
- Bandwidth: 650 Mhz.
- Plug and play, easy to install and operate.
- Built-in advance circuit ensures a smooth transition when switching from one PC/HD source into another.
- RS-232 interface allows control from a distant device.
- Ideal for presentation and large shop intergration.
- Audio format: L/R analog.


Operation Controls and Functions

Front Panel

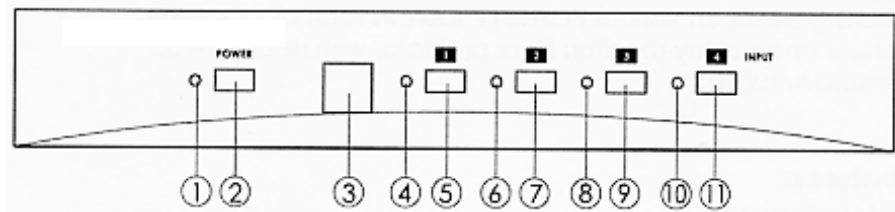

1. **Power indicator LED.**
2. **Power ON/OFF switch:** Push the button to turn ON/OFF the power.
3. **IR sensor:** Infrared remote control sensor.
4. **Input 1 indicator LED .**
5. **Input 1 switch:** Push the button, LED lights up, source 1 is selected.
6. **Input 2 indicator LED.**
7. **Input 2 switch:** Push the button, LED lights up, source 2 is selected.
8. **Input 3 indicator LED .**
9. **Input 3 switch:** Push the button, LED lights up, source 3 is selected.
10. **Input 4 indicator LED.**
11. **Input 4 switch:** Push the button, LED lights up, source 4 is selected.


Rear Panel

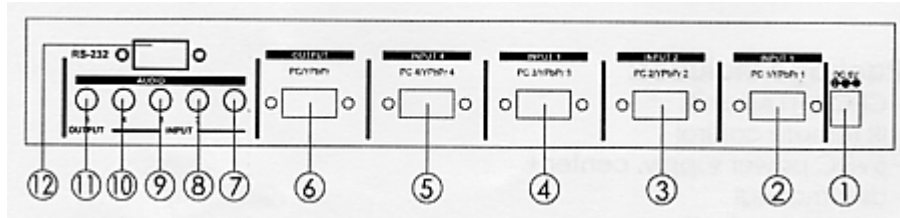

1. **DC 5V:** 5 Volt, 5W DC input , center +.
2. **Input 1 connector:** Input connector for PC 1 /YPbPr 1.
3. **Input 2 connector:** Input connector for PC 2/YPbPr 2.
4. **Input 3 connector:** Input connector for PC 3/YPbPr 3.
5. **Input 4 connector:** Input connector for PC 4/YPbPr 4.
6. **Output connector:** Output connector for PC/YPbPr.
7. **Audio input 1 connector:** Audio input connector for Audio (L+R) 1 via 3.5mm phone jack to 2R audio cable.
8. **Audio Input 2 connector:** Audio input connector for Audio (L+R) 2 via 3.5mm phone jack to 2R audio cable.
9. **Audio input 3 connector:** Audio input connector for Audio (L+ R) 3 via 3.5mm phone jack to 2R audio cable.
10. **Audio input 4 connector:** Audio input connector for Audio (L+R) 4 via 3.5mm phone jack to 2R audio cable.
11. **Audio output connector:** Audio output connector for Audio(L+R) via 3.5mm phone jack to 2R audio cable.
12. **RS-232 interface:** DB-9 female connector for connecting to your other control console for remote control.

Remote Control

1. **Power:** Switch between power ON and Standby.
 2. Press button 1 to select source 1.
 3. Press button 2 to select source 2.
 4. Press button 3 to select source 3. 5. Press button 4 to select source 4.
- Note:** Replacement battery can be found at a local electronic retail store.

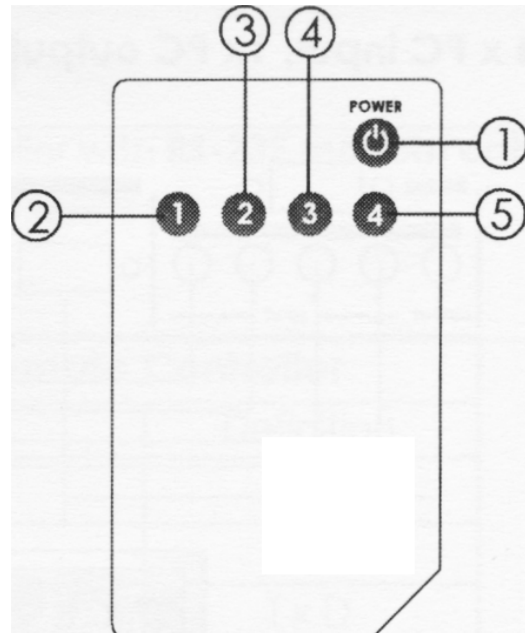

Remote Control Protocol

* The connection between the PC/HD Switcher 4 input : 1 output w/RS232 and remote controller with RS-232 modem cable.

Pins definition of modem cable

PC/HD Switcher			Remote Controller	
PIN	Definition		PIN	Definition
1	NC	▶	1	NC
2	T x D		2	R x D
3	R x D		3	T x D
4	NC		4	NC
5	GND		5	GND
6	NC		6	NC
7	NC		7	NC
8	NC		8	NC
9	NC		9	NC

* RS-232 transmission format:

Baud Rate : 9600 bps


Data Bit : 8 Bits Parity: None Stop Bit: 1 bit

* Command :


Command Code	Comment
"I" + "1"	PORT 1 ON
"I" + "2"	PORT 2 ON
"I" + "3"	PORT 3 ON
"I" + "4"	PORT 4 ON
"P" + "4"	POWER ON
"P" + "0"	POWER OFF

Installation and Connections

1. 4 x PC input, 1x PC output

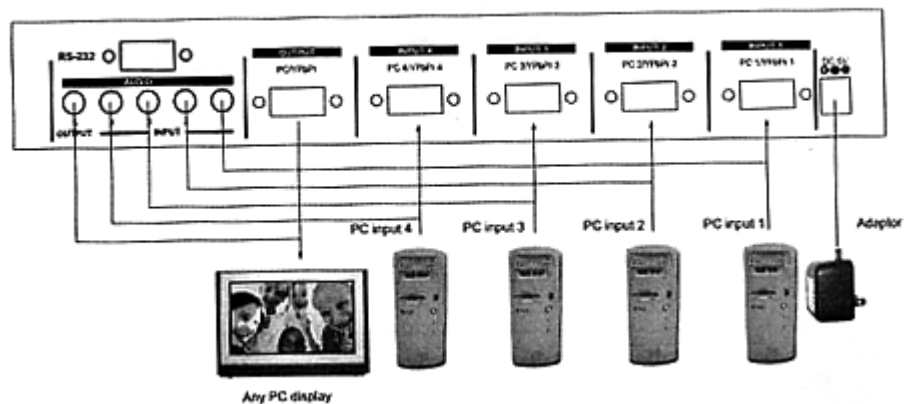

2. 4 x HD input, 1x HD output

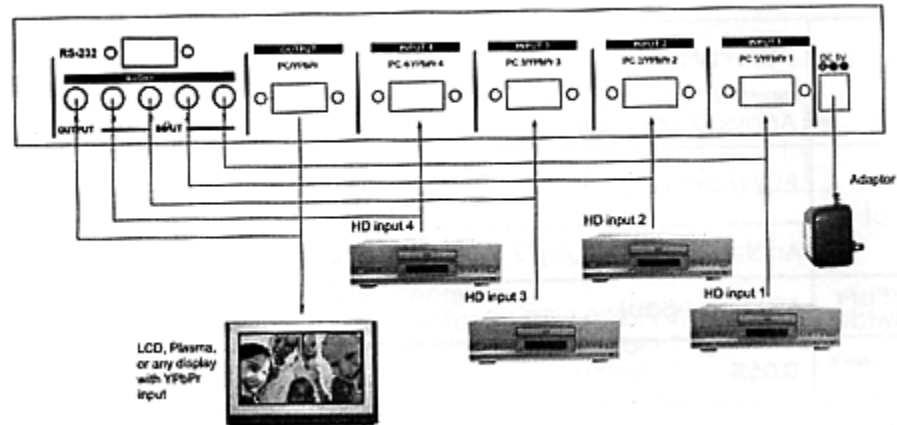

Specifications

Input	PC/YpPr:4	RGB: 0.7Vp-p or 1 Vp-p with sync75 ohm /HD(TTL): 5Vp-p 10 K ohm
	Analog Audio: 4 (L/R)	2Vrms max 47 k ohm
Output	PC/YpPr:1	RGB: 0.7Vp-p or 1 Vp-p with sync 75 ohm /HD(TTL): 5Vp-p 10k ohm
	Analog Audio: 1 (L/R)	2 Vrms max 47 k ohm
PC /YpPr Bandwidth	650 MHz (-3db)	
Differential gain	0.05%	
Differential phase	0.05 degree	
Power consumption	5 Watts (max.)	
Power	5V 1A AC adaptor	
Dimensions	292(W)x 73(D) x 44(H)mm	
Unit gross	1.5Kgs	