

HDMI to CV/SV Scaler with HDMI Bypass (Apple Compatible) - ID# 15340



Operation Manual

Introduction

The HDMI to CV/S-Video Converter is designed to convert the digital signal from HDMI (or DVI) source to analog signal of NTSC or PAL system, with L/R stereo audio. As well as S-Video and Composite video outputs, it also provides an HDMI bypass output to deliver the original signal, and a Coaxial output to send S/PDIF digital audio to an amplifier. Not only these, the device also has manual selection of underscan and overscan on output image to ensure the screen best fit for viewer's pleasantation. And, the model has a special Apple Mode switch which allows user to use Apple TV or other Apple devices as source equipment.

Features

- HDMI, HDCP and DVI compliant
- Converts video signal from HDMI source to NTSC or PAL signal (selectable)
- Converts digital audio from HDMI source to analog stereo audio
- Accepts a wide range of HDTV input resolutions, from 480i to 1080p@60Hz and PC from VGA@60Hz to WUXGA@60Hz (RB)
- Supports Coaxial input audio sample rate 44.1KHz, 48KHz and 96KHz
- Output image overscan or underscan switch ensure best fit on screen
- Apple Mode switch guarrantees the use of Apple devices

Applications

- HDMI to Composite Video or S-Video signal conversion
- HDMI to NTSC/PAL system conversion
- HDMI to SD resolution for recordgin/monitoring


System Requirements

Source equipment such as PC/Laptor or HDMI camcorder and display devices such as TV/monitor with HDMI connection cables.



Operation Controls and Functions

Front Panel

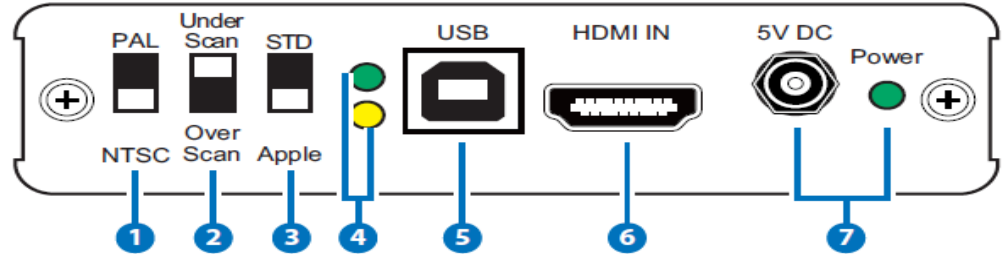

PAL/NTSC Switch: Select the required format for output display.

UnderScan/OverScan Switch: Select the required screen for output display.

STD/Apple Switch: Switch to Apple mode when the connected HDMI source equipment is an Apple device (such like Apple TV), otherwise, switch to STD mode.


LED: The yellow LED will illuminate when Apple Mode is selected, and the green LED will illuminate for STD mode.

USB: This slot is reserved for firmware update only.

HDMI IN: Connect to the HDMI output of a source equipment such as an PC/Laptop or HDMI camcorder.

5V DC & Power LED: Connect the 5V DC power supply into the unit and plug the adaptor to AC wall outlet. The LED will illuminate when power supply is connected.

Back Panel

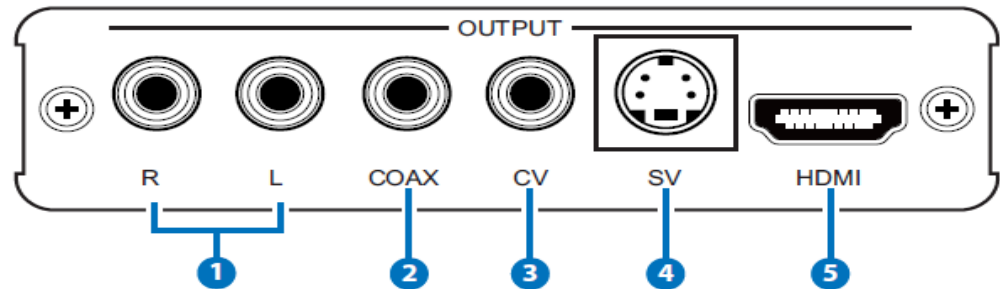

R/L OUTPUT: Connect to active speaker with RCA cables for synchronize video output with HDMI, S-Video or Composite video.

COAX OUTPUT: Connect with active speaker wor amplifier with coaxial cable for synchronize video output with HDMI, S-Video or Composite video.

CV OUTPUT: Connect to the Composite Video input of a display or recording device.

SV OUTPUT: Connect to S-Video input of a display or recording device.

HDMI Bypass OUTPUT: Connect to the HDMI input of a display.

Supported Resolutions

HD Resolutions	PC Resolutions
480i/p@60	640x448@60,72,75,85
576i/p@50	720x400@70
720p@50/60	800x600@56,60,72,75,85
1080p@24	1024x768@60,70,75,85
1080i@50/60	1152x864@70,75,85
1080p@50/60	1280x720@60(CVT)
	1280x768@60,60(RB)
	1280x800@60,60(RB),75
	1280x960@60
	1280x1024@60,75
	1366x768@60,60(RB)
	1400x1050@60,60(RB)
	1440x900@60,60(RB),75
	1600x900@60(RB)
	1600x1200@60
	1680x1050@60,60(RB)
	1920x1200@60(RB)

Note: DVI source input does not support 480i and 576i

Supported Audio


Audio Output\ AV Source	HDMI with Embedded Audio
HDMI Bypass	Yes
Coaxial Audio	Yes
Stereo Audio	Yes (input audio supports LPCM 2CH)

**Video and Audio
Conversion/Bypass
Options**

INPUT	Both video and audio from HDMI source
OUTPUT	HDMI → Bypass, output original video and audio from HDMI
	COAXIAL → output digital audio from HDMI
	CV+R/L Audio → Output analog video/ audio converted from HDMI
	SV+R/L Audio → Output analog video/ audio converted from HDMI

- Note: 1.** For DVI input or output you will need to use an HDMI to DVI adaptor or cable.
- 2.** When the signal from an HDMI or DVI source is protected by HDCP, the HDMI or DVI display also needs to support HDCP to be able to show the content.
- 3.** When receiving content that has HDCP encryption, the Composite Video and S-Video outputs will not display an image.

Connection Diagram

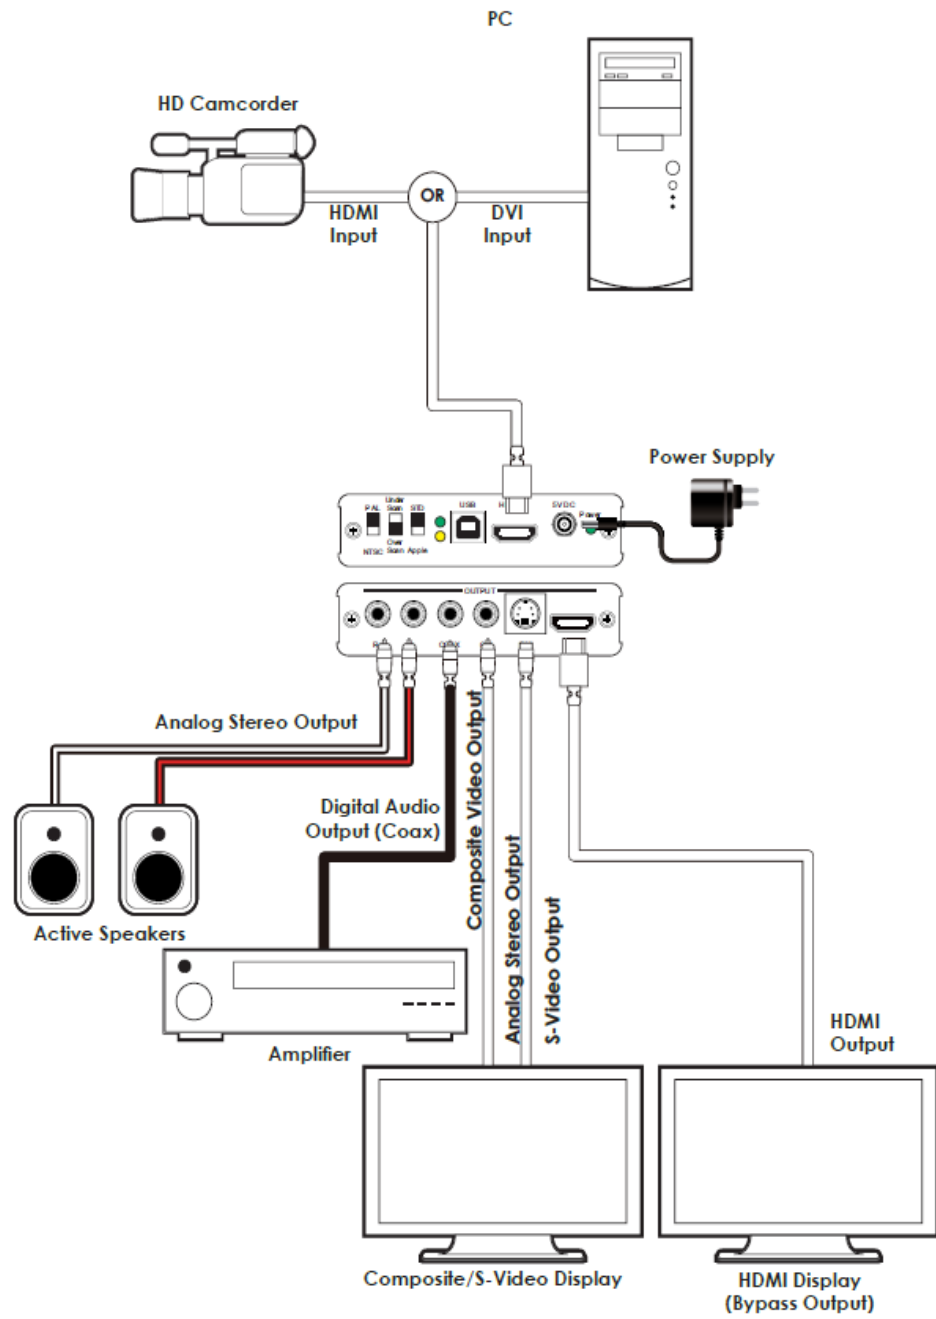

Specifications

Input port	1 x HDMI type A, 1 x USB type-B
Output Ports	1 x HDMI type A, 1 x Coaxial, 1 x Stereo R/L RAC jack, 1 x Composite-Video RCA jack, 1 x S-Video
Power Supply	5V / 2.6A DC (US/EU standards, CE/FCC/UL certified)
Dimensions	102mm(W) x 146.5mm(D) x 25mm(H)
Weight	302g
Chassis Material	Aluminum
Silkscreen Color	Black
Operating Temperature	0°C ~ 40°C / 32°F ~104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)
Power Consumption	3.5W